REV.	DESCRIPTION	DATE
A		
B		08-2010

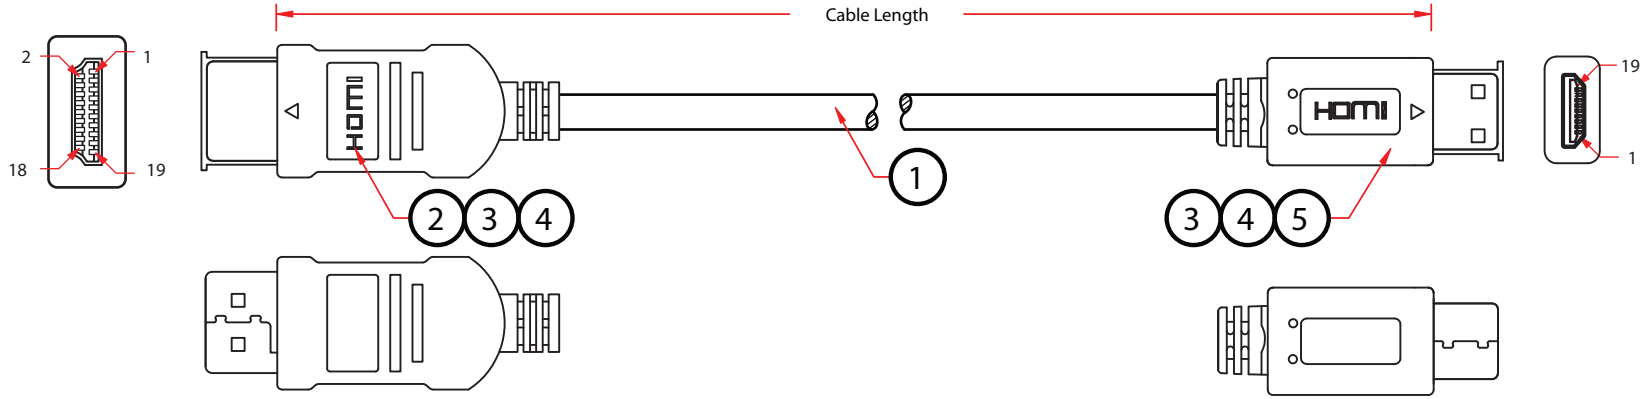

Cable Specifications:

30AWG 7/0.10mm and 28AWG 7/0.127mm Stranded Tinned Copper Conductor
0.025mm AL-Mylar Foil Shield
85% Coverage Tinned Copper Braid
0.58mm Foam PE(1P*5) and 0.75mm HD-PE(4C) Insulation
30AWG 7/0.10mm Stranded Tinned Copper Drain Wire
6.0 mm OD PVC Jacket

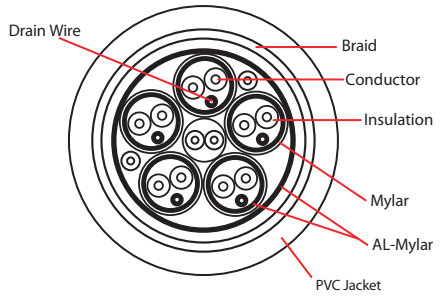

Pin Assignment

HDMI Male		HDMI Male	HDMI Male		HDMI Male
1	White	2	10	White	11
2	Drain	1	11	Drain	10
3	Red	3	12	Green	12
4	White	5	13	Yellow	14
5	Drain	4	14	White	17
6	Brown	6	17	Drain	13
7	White	8	19	Black	19
8	Drain	7	15	Red	15
9	Blue	9	16	Green	16
			18	Purple	18
			Shell	Braid	Shell

RoHS

PART NO.	CABLE LENGTH
10V3-43103	3 ft
10V3-43106	6 ft
10V3-43110	10 ft
10V3-43115	15 ft

NO.	SPECIFICATIONS
7	
6	
5	Mini HDMI 19/M 30U, Insulation: Black, Solder Type, HDMI Shell: Gold Plated, 15u
4	45P PVC, Color: Black
3	Inner Molding, Color: Clear
2	HDMI 19/M 30U, Insulation: Black, Solder Type, HDMI Shell: Gold Plated, 15u
1	UL20276 3C [(30AWG*1P + Drain) w/Al-Foil] *4 + 28AWG*4C, w/Al-Foil + Braid, OD: 6.0mm, Black PVC Jacket

BOM LIST

ITEM NUMBER	10V3-431xx			DRAWER	LIBRA
TITLE	HDMI to Mini HDMI Cable, High Speed with Ethernet			CHECKED	
				APPROVED	
MATERIAL		SCALE			
REV.	A	UNIT	INCH		
DRAWING NO:					

888-212-8295 .com CableWholesale